


# SPECIFYING CODES

## LAMI-VENT™ MODEL PAT LAMINAR FLOW DIFFUSERS

Example:

PAT-2448-A-08R-L-F-0-HIP

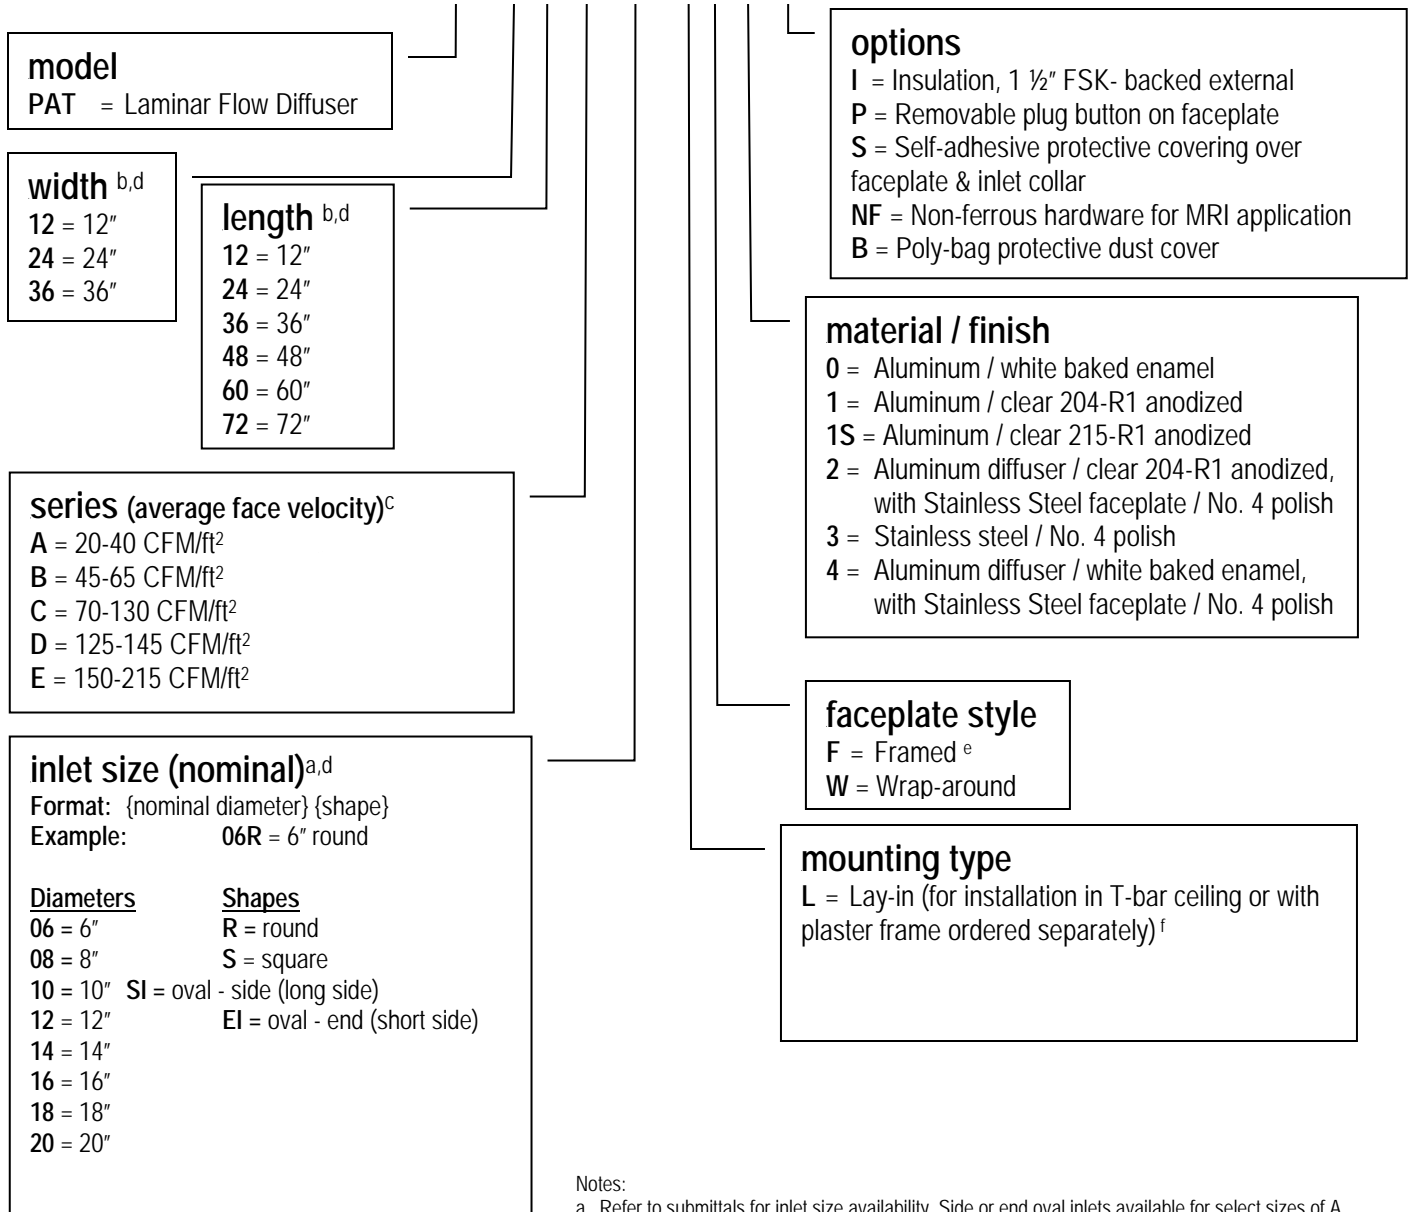

**Notes:**

- Refer to submittals for inlet size availability. Side or end oval inlets available for select sizes of A & B series models only. When ordering, specify equivalent size oval inlet by nominal flex duct size required.
- Custom sizes/configurations/options available - consult factory. 72" nom. length available in 12" & 24" widths only.
- Where average face velocity is equal to the total diffuser airflow divided by the overall diffuser face area, e.g. a 24" x 48" diffuser handling 240 CFM has an average face velocity of 240 CFM / 8ft<sup>2</sup> = 30 CFM/ft<sup>2</sup>.
- For standard features and dimensions, refer to submittal sheets.
- Not available with stainless steel faceplate.
- For surface-mount in GWB hard ceilings, order plaster frame(s) or factory-welded ceiling framing sections for diffusers or lights located adjacent to one another. Customer to provide framing configuration(s) required.

©2018, Precision Air. Subject to change without notice.

1-800-404-0931

[www.precisionairproducts.com](http://www.precisionairproducts.com)