


HEPA-FILTERS

FOR USE WITH LOW-A UNITS ONLY
NOT AVAILABLE FOR HEP-DS SERIES

MODEL GAS-L
GASKET SEAL FILTER


LOW FLOW - 53mm MEDIA

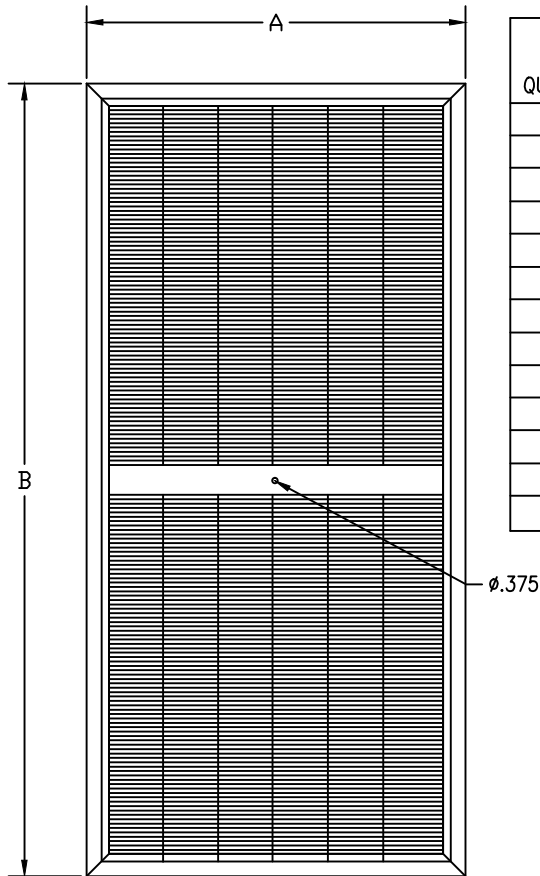

QUANTITY	NOMINAL DIFFUSER SIZE	FILTER SIZE		ACTIVE MEDIA AREA W/ CENTER BOARD	ACTIVE MEDIA AREA W/O CENTER BOARD
		A	B		
	1 x 2	7.375	19.500	0.49 ft ²	0.53 ft ²
	1 x 3	7.375	31.625	0.87 ft ²	0.92 ft ²
	1 x 4	7.375	43.750	1.26 ft ²	**
	1 x 5	7.375	55.875	1.64 ft ²	**
	1 x 6	7.375	68.000	2.03 ft ²	**
	2 x 2	19.500	19.500	1.79 ft ²	1.94 ft ²
	2 x 3	19.500	31.625	3.19 ft ²	3.34 ft ²
	2 x 4	19.500	43.750	4.60 ft ²	**
	2 x 5	19.500	55.875	6.00 ft ²	**
	2 x 6	19.500	68.000	7.41 ft ²	**
	3 x 3	31.625	31.625	5.51 ft ²	5.77 ft ²
	3 x 4	31.625	43.750	7.94 ft ²	**
	3 x 5	31.625	55.875	10.36 ft ²	**

* CENTER BOARD REQUIRED ON ALL DIFFUSERS WITH TOP INLETS. DIFFUSERS WITH SIDE OR END INLETS DO NOT REQUIRE CENTER BOARDS EXCEPT FOR SIZES LARGER THAN 4' WIDE.

** NOT AVAILABLE WITHOUT CENTER BOARD.



NOTES:

1. FILTER MEDIA: MICRO-GLASS / ACRYLIC RESIN BINDER
2. SEPARATOR MAT'L: 37/1/5 FIBERGLASS THREAD SPACED AT 44mm INTERVALS
3. FRAME MAT'L: 6063-T5 ANODIZED ALUMINUM (CENTER DIVIDER PROVIDED ON SIZES LARGER THAN 4' LONG. OPTIONAL ON ALL OTHER MODELS.)
4. SEALANT MAT'L: FIRE RETARDANT TWO PART POLYURETHANE
5. SEAL: CLOSED-CELL NEOPRENE GASKET ON DOWNSTREAM FLANGE

FILTER SPECIFICATIONS:

PLEAT DEPTH: 53mm
EFFICIENCY: 99.99% @ 0.3 MICRON
RESISTANCE: 0.50" w.g. @ 100 FPM FILTER FACE VELOCITY

FORM 4-236 EFF. 10/2018

JOB: _____
ENGINEER: _____
ARCHITECT: _____
CONTRACTOR: _____



PHONE: 1-800-404-0931 www.precisionairproducts.com

THE ITEMS SHOWN ON THIS DRAWING MAY BE COVERED BY ONE OR MORE PATENTS OF PRECISION AIR PRODUCTS CO. THE DESIGN AND DRAWING ARE THE PROPERTY OF THE CORPORATION AND DUPLICATION IS NOT PERMITTED, EXCEPT WITH WRITTEN CONSENT FROM THE CORPORATION. DIMENSIONS SHOWN ARE SUBJECT TO NORMAL MANUFACTURING TOLERANCES. THIS DRAWING IS FOR SUBMITTAL PURPOSES ONLY AND SUBJECT TO REVISION.